DF60650F/S/P

FEATURES

Patented dual-stacked, sealed burners offer precise temperature adjustment

Burners produce up to 20,000 Btu for fast boils and intense sears and as low as 300 Btu for true simmers and melts

For improved temperature control and safety, the spark ignition system reignites burners automatically

Wolf's Dual VertiFlow™ convection system provides reliably even heat, reduces hot and cold spots, and enables consistent multi-rack cooking

Gourmet Mode features nearly 50 presets that automatically control the oven to ensure delicious results

Take the guesswork out of cooking with 10 chef-created cooking modes, including Bake, Broil, Convection, Convection Roast, Dehydrate, Gourmet, Proof, Roast, Stone, and Warm

Easily slide pots across the French top for a graduated cooking surface with the highest temperature under the center plate and the lowest closer to the outer edges

The full-color touchscreen is intuitive and easy to read, discreetly hiding away when not in use

LED backlit control bezels illuminate when in use, indicating which burners are active

The oven offers self-clean, delayed start, timed cook, and Sabbath features

The temperature probe alerts you when your dish has reached the desired temperature

Control your range from wherever you are using our convenient Owner's App—remotely preheat, adjust temperatures, select modes, and more

ACCESSORIES

2-Burner Wok Grate

30" Broiler Pan

30" Dehydration Rack Set

30" Full-Extension Ball-Bearing Oven Rack

30" Premier Baking Sheet

30" Standard Oven Rack

48" and 60" Dual Fuel Brushed Brass Bezel Kit

Bake Stone Kit

Filler Trim

Temperature Probe

Red, black, brushed stainless, brushed brass, and brushed gray knob kits

Rear Caster Covers

Front Leg Extension Covers

Stainless Steel Kickplates

5" and 10" stainless steel risers, and 20" riser with shelf

Accessories available through an authorized dealer.




MOL

KNOB OPTIONS



TOP CONFIGURATION



RANGETOP SPECIFICATIONS

- 1 9,200 Btu burner
- 2 15,000 Btu burners
- 2 18,000 Btu burners
- 1 20.000 Btu burner
- 1 15,000 Btu French top
- · Stainless-steel French top cover
- · Stainless-steel island trim

| For local dealer information, vis | it subzero-wolf.com/locator. |
|-----------------------------------|------------------------------|
|-----------------------------------|------------------------------|

Specifications are subject to change without notice. This information was generated on May 7, 2024. Verify specifications prior to finalizing your cabinetry/enclosures.


60" DUAL FUEL RANGE - 6 BURNERS AND FRENCH TOP

PRODUCT SPECIFICATIONS

| Model | DF60650F/S/P |
|-------------------------------|--------------------------------|
| Dimensions | 59 7/8"W x 36 1/2"H x 29 1/2"D |
| Oven 1 Interior Dimensions | 25 1/4"W x 17 1/2"H x 20"D |
| Oven 2 Interior Dimensions | 25 1/4"W x 17 1/2"H x 20"D |
| Oven 1 Usable Capacity | 3.2 cu. ft. |
| Oven 1 Overall Capacity | 5.1 cu. ft. |
| Oven 2 Usable Capacity | 3.2 cu. ft. |
| Oven 2 Overall Capacity | 5.1 cu. ft. |
| Door Clearance | 21" |
| Electrical Supply | 240/208 VAC, 60 Hz |
| Electrical Service | 50 amp dedicated circuit |
| Gas Supply | 3/4" ID line |
| Gas Inlet | 1/2" NPT female |


ELECTRICAL

GAS




NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS

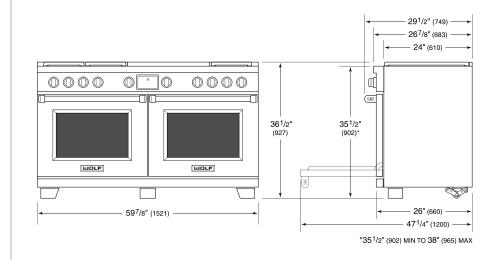

MOLF

STANDARD INSTALLATION

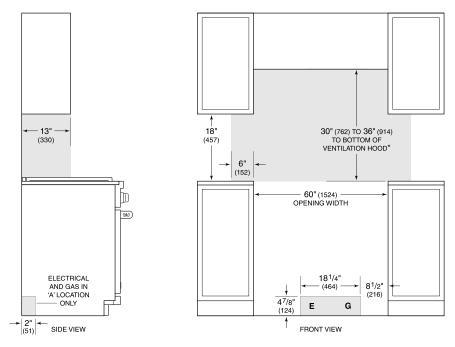

*Without ventilation hood, 36" (914) minimum clearance countertop to combustible materials, 44" (1118) for charbroiler. NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces,

combustible materials cannot be located within this area.

For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.