

**DW2450**

**FEATURES**

Rigorously tested in our U.S. manufacturing facilities to ensure decades of use

Exceptional support from Madison, WI-based Customer Care team

Height-adjustable middle rack and fold-down tines adjust to any size or combination of dishes

LED lit interior for better interior visibility

Accepts cabinet panels for a custom look or stainless panels and handles to match Sub-Zero and Wolf products

Easy-to-use, touch controls and display are hidden to maintain clean lines and a status floor light indicates cycle status

Near-silent operation never interrupts the conversation

Custom wash and dry options and three separate spray arms to ensure optimal cleaning performance

**ACCESSORIES**

24" Door Panels

24" Door Panels

24" Door Panels

24" Door Panels

4" Stainless Kickplate - 24" Opening

4" Stainless Kickplate - 60cm Opening

6" Stainless Kickplate - 24" Opening

6" Stainless Kickplate - 60cm Opening

60cm Door Panels

60cm Door Panels

60cm Door Panels

60cm Door Panels

Pro Handle

Tubular Handle

Accessories are available through an authorized dealer. For local dealer information, visit [subzero-wolf.com/locator](http://subzero-wolf.com/locator).



**HANDLE ACCESSORIES**

PRO



TUBULAR





**PRODUCT SPECIFICATIONS**

Model	DW2450
Dimensions	23 5/8"W x 34 1/2"H x 23 1/4"D
Door Clearance	26 3/4"
Electrical Supply	115 VAC, 60 Hz
Electrical Service	15 amp dedicated circuit
Receptacle	3-prong grounding-type
cord-length	3'
Water Connection	5' braided tubing with 3/8" female compression fitting
Drain Connection	5' (1.5 m) corrugated tubing
Plumbing Pressure	30–140 psi


**ELECTRICAL**

**PLUMBING**

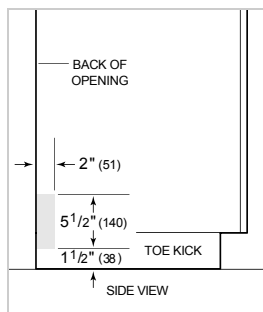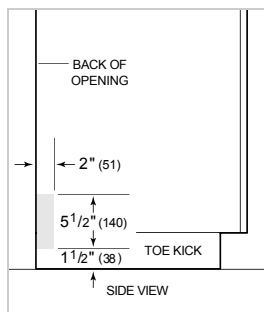


**PANEL SPECIFICATIONS** For complete panels specifications including width/height, weight requirements and thickness requirements visit [subzero-wolf.com/reveal](http://subzero-wolf.com/reveal).

**INTERIOR VIEW**

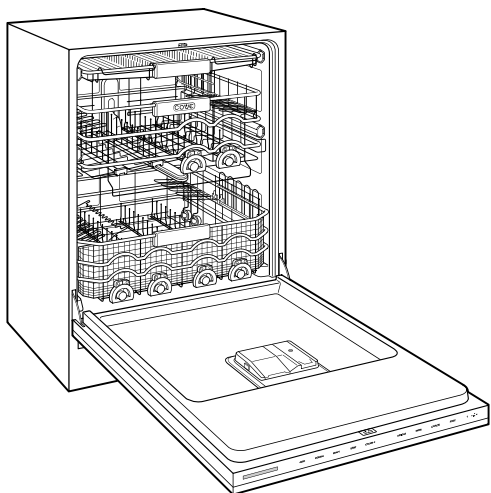


This illustration is intended for interior reference only and may not represent the exterior of the model being specified.


**DIMENSIONS**

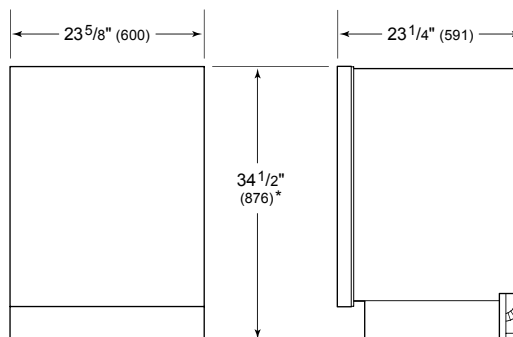

\*34" (864) MIN TO 34 5/8" (880) MAX

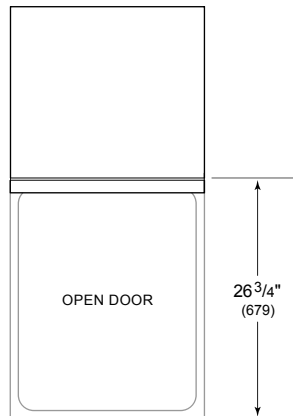

**STANDARD INSTALLATION**

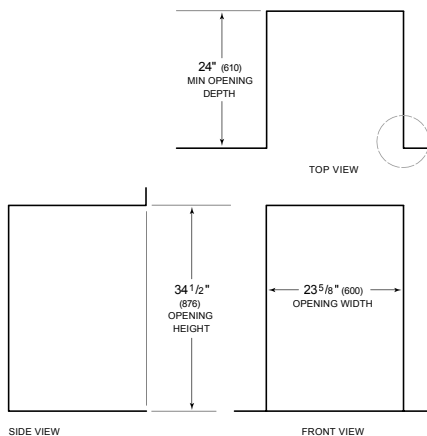

NOTE: 3 1/2" (89) finished returns will be visible and should be finished to match cabir

