

IT-30FI



**FEATURES**

- Monitor and control remotely with Wi-Fi connectivity

---

- Accepts custom panels for an integrated look within cabinetry or stainless-steel accessory panels and handles to match other Sub-Zero, Wolf, and Cove products\*

---

- Preserves frozen foods with frigid, dry air

---

- Controls temperature within one degree of setpoint

---

- Locks in cold air with a magnetic door seal system

---

- Filters ice, removing contaminants, chlorine taste, and odour

---

- Yields ice automatically and “max ice” for additional production

---

- Control brightness with soft-on LED lighting

**ACCESSORIES**

- Reduced Toekick Divider

---

- Stainless Steel Side Panel

---

- Stainless Steel Top Panel

---

- Water Filter

---

- Water Filter

---

- Dual Installation Kits

---

- Stainless Steel Door Panels With Pro Handle

---

- Stainless Steel Door Panels With Tubular Handle

---

- Stainless Steel Drawer Panels With Pro Handles

---

- Stainless Steel Drawer Panels With Tubular Handles

---

- Stainless Steel Dual Installation Kickplates

---

- Stainless Steel Pro Handles


---

- Stainless Steel Tubular Handles

Accessories are available through an authorized dealer. For local dealer information, visit [subzero-wolf.com/locator](http://subzero-wolf.com/locator).



**HANDLE ACCESSORIES**

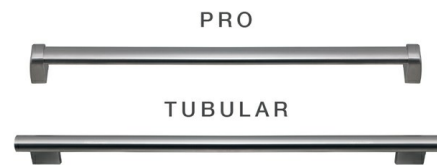

**PRODUCT DETAILS**


**FREEZER**

- LED freezer lights
- 3 adjustable wire shelves
- 4 adjustable door shelves
- 2 full-extension roll-out freezer drawers; one with adjustable dividers
- Automatic ice maker with removable ice container

**PRODUCT SPECIFICATIONS**




|                       |   |
|-----------------------|---|
| Model                 | IT-30FI   |
| Dimensions            | 30"W x 84"H x 24"D                                    |
| Refrigerator Capacity | 15.1 cu. ft.  |
| Door Clearance        | 28 1/2"   |
| Drawer Clearance      | 18 3/8"   |
| Weight                | 458 lbs   |
| Electrical Supply     | 115 VAC, 60 Hz  |
| Electrical Service    | 15 amp dedicated circuit                              |
| Plumbing Supply       | 1/4" OD copper, braided stainless steel or PEX tubing |
| Plumbing Pressure     | 35–120 psi  |

**DIMENSIONS**

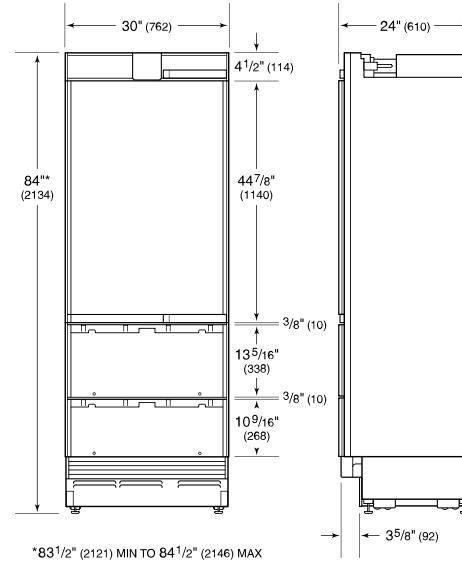

**ELECTRICAL**

**PLUMBING**




**NOTE:** The electrical outlet must be positioned with the grounding prong to the right of the thinner blades.

**PANEL SPECIFICATIONS** For complete panels specifications including width/height, weight requirements and thickness requirements visit [subzero-wolf.com/reveal](http://subzero-wolf.com/reveal).


**NOTE:** Dimensions in parenthesis are in millimeters unless otherwise specified

**STANDARD INSTALLATION**

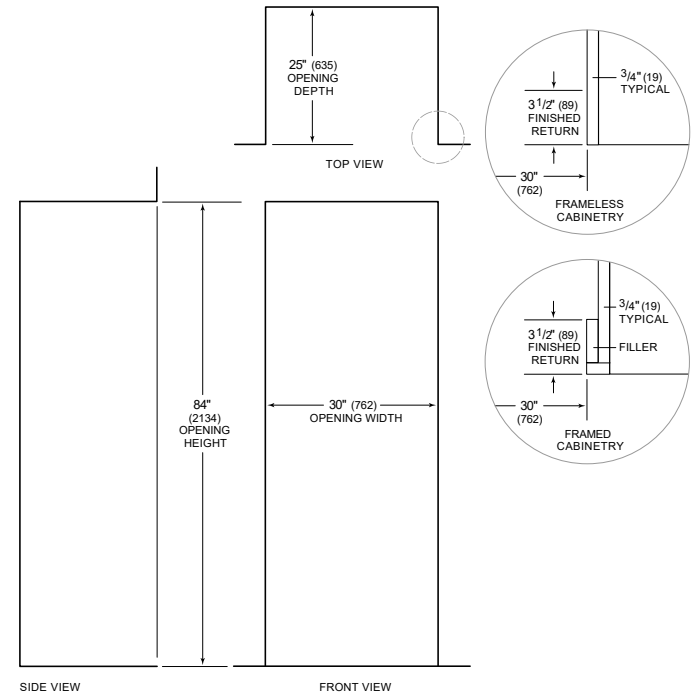

**NOTE:** 3 1/2" (89) finished returns will be visible and should be finished to match cabinetry

**INTERIOR VIEW**

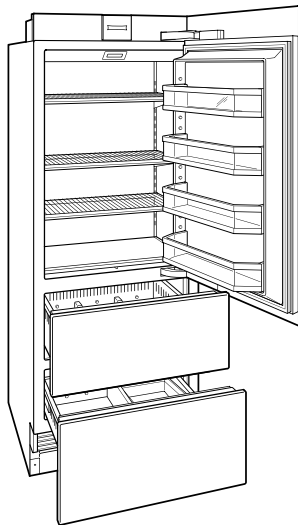

This illustration is intended for interior reference only and may not represent the exterior of the model being specified.