

GR304



FEATURES

Rigorously tested for decades of use

Exceptional support from our Customer Care team in Madison

Dual-stacked, sealed burners for higher highs, lower lows

Heavy-gauge stainless steel

Signature red infinite control knobs

Continuous cast-iron grates for easy movement of pots and pans

Spark ignition system re-ignites if flame goes out

Adjustable legs for stability, plus rear casters

Convection oven for faster, more consistent cooking

Infrared broiler inside oven sears quickly and evenly

Accommodate up to four large pots or pans simultaneously on the wide cooking surface

ACCESSORIES

2-Burner Wok Grate

Bake Stone Kit

Center S-Grate

Filler Trim

Front Leg Covers

Full-Extension Ball Bearing Rack

S-Grates

Stainless steel, brass or chrome bezels

High altitude conversion kit

Signature red, black or stainless steel control knobs

5" and 10" stainless steel risers, and 20" riser with shelf

Accessories available through an authorized dealer.


For local dealer information, visit subzero-wolf.com/locator.



KNOB OPTIONS



TOP CONFIGURATION




RANGETOP SPECIFICATIONS

- 1 - 9,200 Btu Burner
- 3 - 15,000 Btu Burners

PRODUCT SPECIFICATIONS


Model	GR304
Dimensions	29 7/8"W x 37"H x 28 3/8"D
Oven 1 Interior Dimensions	24"W x 18 5/8"H x 17"D
Oven 1 Usable Capacity	2.5 cu. ft.
Oven 1 Overall Capacity	4.4 cu. ft.
Door Clearance	19 1/2"
Weight	325 lbs
Electrical Supply	110/120 VAC, 50/60 Hz
Electrical Service	15 amp dedicated circuit
Gas Supply	3/4" ID line
Gas Inlet	1/2" NPT female
Receptacle	3-prong grounding-type

DIMENSIONS

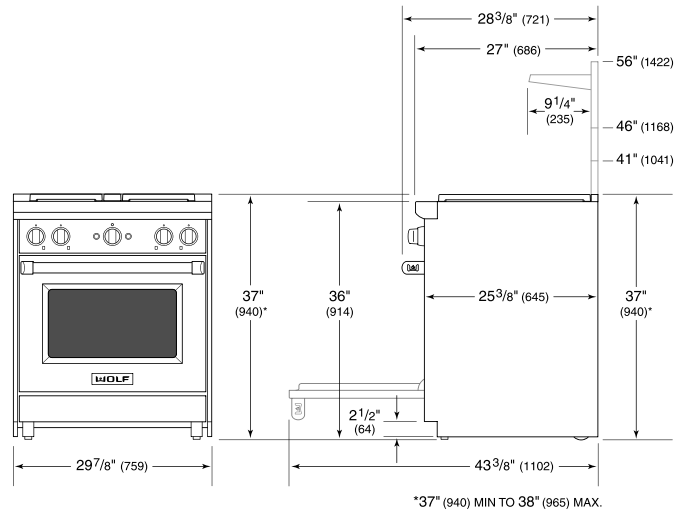


ELECTRICAL

GAS

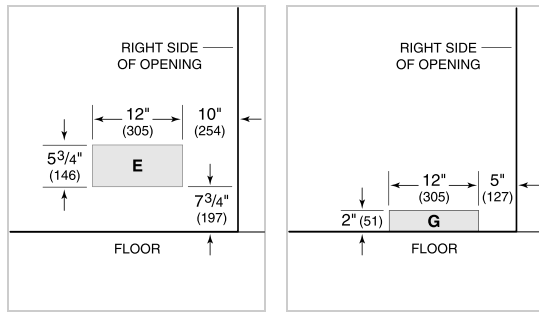

NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

STANDARD INSTALLATION

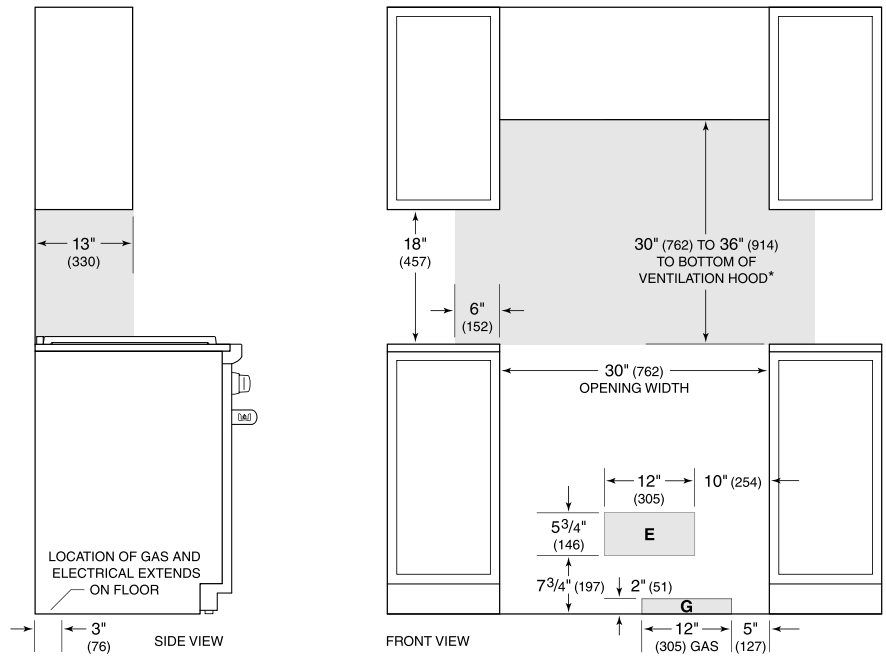

*Without ventilation hood, 42" (1067) minimum clearance countertop to combustible materials, charbroiler and GR488 require non-combustible materials.

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.