

GR484DG



## FEATURES

- \_\_\_\_\_ Rigorously tested for decades of use
- \_\_\_\_\_ Exceptional support from our Customer Care team in Madison
- \_\_\_\_\_ Dual-stacked, sealed burners for higher highs, lower lows
- \_\_\_\_\_ Heavy-gauge stainless steel
- \_\_\_\_\_ Signature red infinite control knobs
- \_\_\_\_\_ Continuous cast-iron grates for easy movement of pots and pans
- \_\_\_\_\_ Spark ignition system re-ignites if flame goes out
- \_\_\_\_\_ Adjustable legs for stability, plus rear casters
- \_\_\_\_\_ Second, 18" non-convection oven
- \_\_\_\_\_ Convection oven for faster, more consistent cooking
- \_\_\_\_\_ Infrared broiler inside 30" oven sears quickly and evenly
- \_\_\_\_\_ 4 dual-stacked burners plus 30,000 Btu dual griddle

## ACCESSORIES

- \_\_\_\_\_ 18" Full-Extension Oven Rack
- \_\_\_\_\_ 2-Burner Wok Grate
- \_\_\_\_\_ 822026-22" Cutting Board
- \_\_\_\_\_ Bake Stone Kit
- \_\_\_\_\_ Filler Trim
- \_\_\_\_\_ Front Leg Covers
- \_\_\_\_\_ Full-Extension Ball Bearing Rack
- \_\_\_\_\_ Griddle Cleaning Pads
- \_\_\_\_\_ Griddle Cleaning Kit
- \_\_\_\_\_ Griddle Cleaning Solution
- \_\_\_\_\_ S-Grates
- \_\_\_\_\_ Stainless steel, brass or chrome bezels
- \_\_\_\_\_ High altitude conversion kit
- \_\_\_\_\_ Signature red, black or stainless steel control knobs
- \_\_\_\_\_ 5" and 10" stainless steel risers, and 20" riser with shelf


Accessories available through an authorized dealer.  
For local dealer information, visit [subzero-wolf.com/locator](http://subzero-wolf.com/locator).



## KNOB OPTIONS



## TOP CONFIGURATION

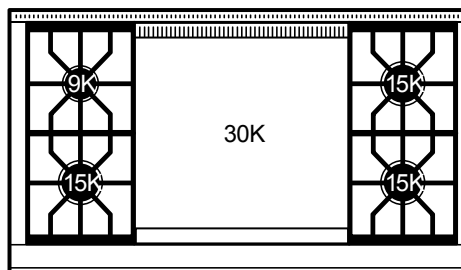

## RANGETOP SPECIFICATIONS


- 1 - 9,200 Btu Burner
- 3 - 15,000 Btu Burners
- 1 - 30,000 Btu (26,000 Btu LP) Double Griddle

**PRODUCT SPECIFICATIONS**

Model	GR484DG
Dimensions	47 7/8"W x 37"H x 28 3/8"D
Oven 1 Interior Dimensions	13 1/2"W x 18 5/8"H x 17"D
Oven 2 Interior Dimensions	24"W x 18 5/8"H x 17"D
Oven 1 Usable Capacity	1.6 cu. ft.
Oven 1 Overall Capacity	2.5 cu. ft.
Oven 2 Usable Capacity	2.9 cu. ft.
Oven 2 Overall Capacity	4.4 cu. ft.
Door Clearance	19 1/2"
Weight	750 lbs
Electrical Supply	110/120 VAC, 50/60 Hz
Electrical Service	15 amp dedicated circuit
Gas Supply	3/4" ID line
Gas Inlet	1/2" NPT female
Receptacle	3-prong grounding-type


**ELECTRICAL**

**GAS**

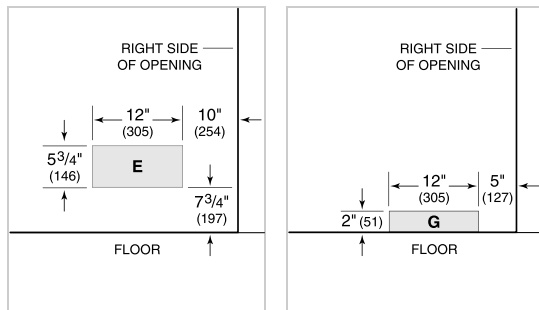


**NOTE:** Dimensions in parenthesis are in millimeters unless otherwise specified

**DIMENSIONS**

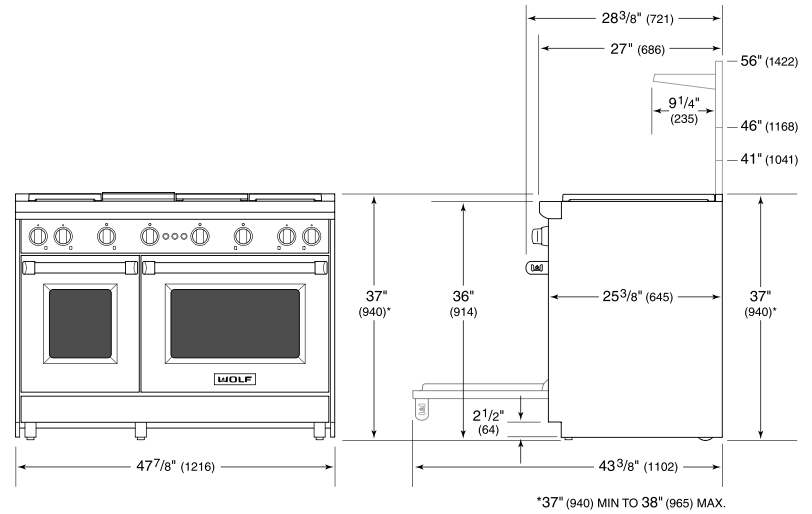

**STANDARD INSTALLATION**

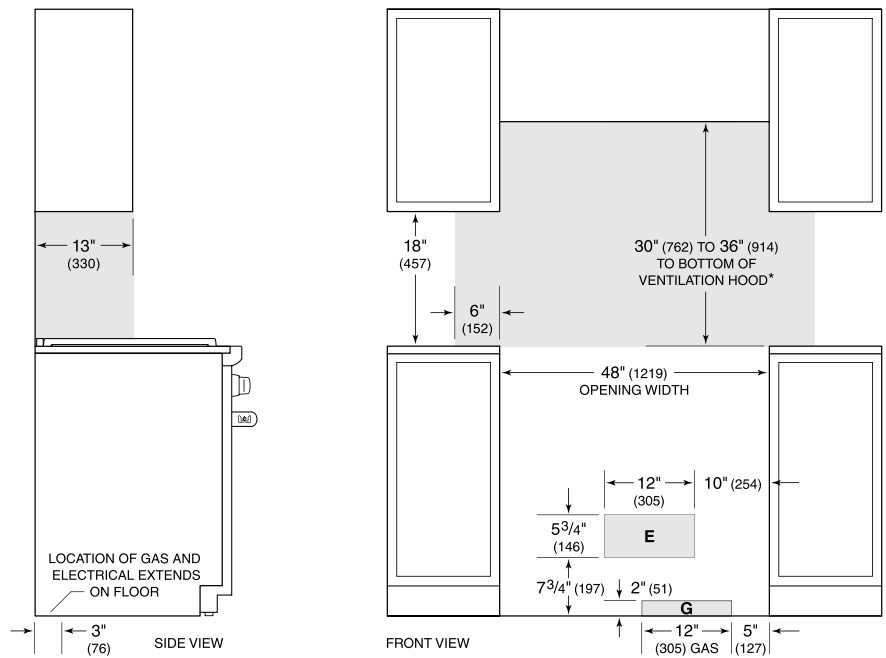

*\*Without ventilation hood, 42" (1067) minimum clearance countertop to combustible materials, charbroiler and GR488 require non-combustible materials.*

*NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.*

*For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.*