

GR486C



FEATURES

Rigorously tested for decades of use

Exceptional support from our Customer Care team in Madison

Dual-stacked, sealed burners for higher highs, lower lows

Heavy-gauge stainless steel

Signature red infinite control knobs

Continuous cast-iron grates for easy movement of pots and pans

Spark ignition system re-ignites if flame goes out

Adjustable legs for stability, plus rear casters

Second, 18" non-convection oven

Convection oven for faster, more consistent cooking

Infrared broiler inside 30" oven sears quickly and evenly

6 dual-stacked burners plus 16,000 Btu infrared charbroiler

ACCESSORIES

18" Full-Extension Oven Rack

2-Burner Wok Grate

Bake Stone Kit

Filler Trim

Front Leg Covers

Full-Extension Ball Bearing Rack

S-Grates

Stainless steel, brass or chrome bezels

High altitude conversion kit

Signature red, black or stainless steel control knobs

5" and 10" stainless steel risers, and 20" riser with shelf

Accessories available through an authorized dealer.


For local dealer information, visit subzero-wolf.com/locator.



KNOB OPTIONS



TOP CONFIGURATION

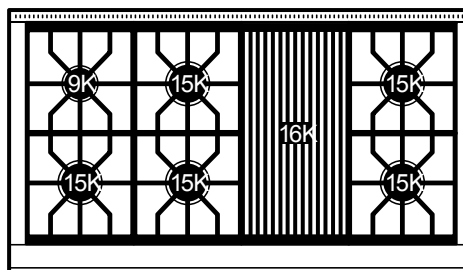

RANGETOP SPECIFICATIONS


- 1 - 9,200 Btu Burner
- 5 - 15,000 Btu Burners
- 16,000 Btu Charbroiler

PRODUCT SPECIFICATIONS

Model	GR486C
Dimensions	47 7/8"W x 37"H x 28 3/8"D
Oven 1 Interior Dimensions	13 1/2"W x 18 5/8"H x 17"D
Oven 2 Interior Dimensions	24"W x 18 5/8"H x 17"D
Oven 1 Usable Capacity	1.6 cu. ft.
Oven 1 Overall Capacity	2.5 cu. ft.
Oven 2 Usable Capacity	2.9 cu. ft.
Oven 2 Overall Capacity	4.4 cu. ft.
Door Clearance	19 1/2"
Weight	750 lbs
Electrical Supply	110/120 VAC, 50/60 Hz
Electrical Service	15 amp dedicated circuit
Gas Supply	3/4" ID line
Gas Inlet	1/2" NPT female
Receptacle	3-prong grounding-type


ELECTRICAL

GAS

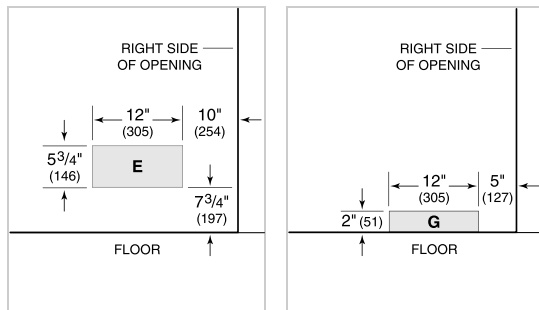


NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS

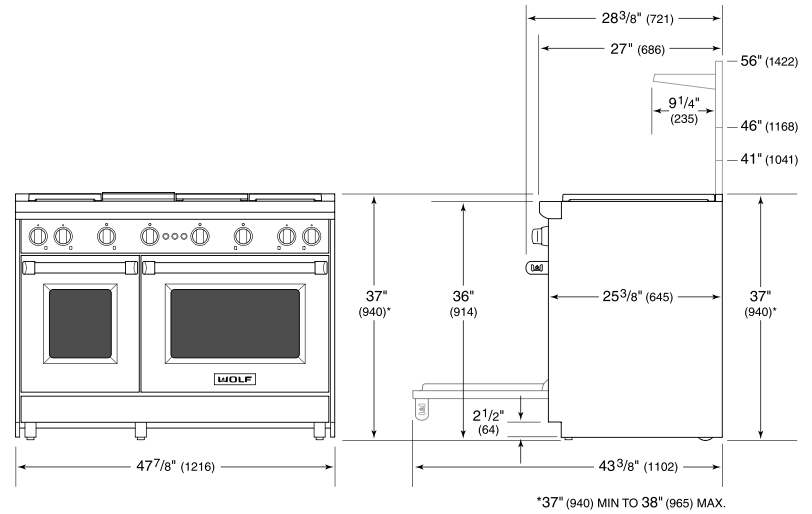

STANDARD INSTALLATION

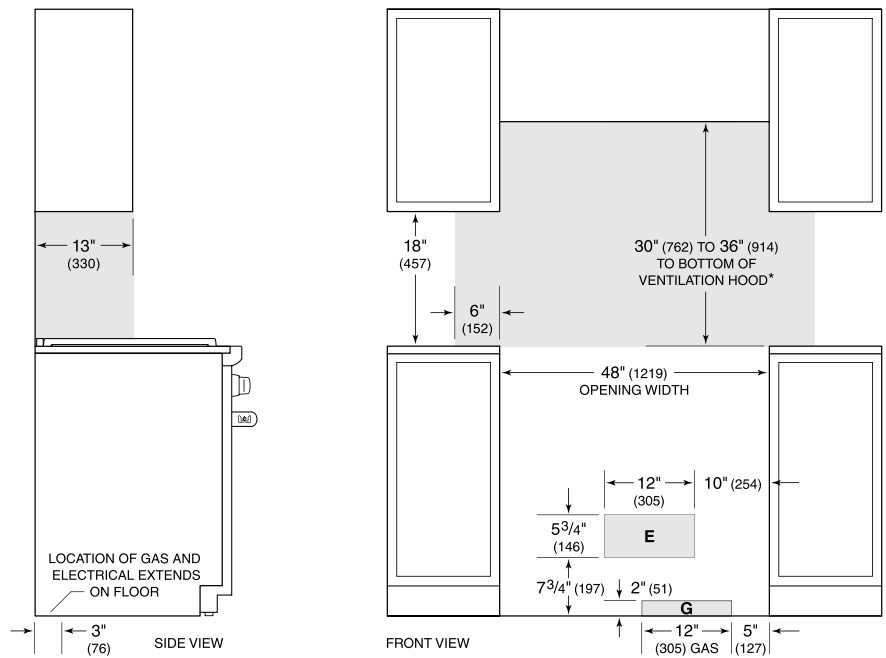

**Without ventilation hood, 42" (1067) minimum clearance countertop to combustible materials, charbroiler and GR488 require non-combustible materials.*

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.

For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.