# 36" SEALED BURNER RANGETOP - 6 BURNERS

SRT366

## FEATURES

Maintain control with six dual-stacked burners that go from 20,000 Btu down to a mere breath of flame

Simmer and melt sauces, soups, and marinades easily with the lower tier of the dual-stacked burner

Match other Sub-Zero, Wolf, and Cove products with heavy-gauge stainless steel and signature red infinite control knobs

Cleanup is a snap as sealed, seamless burner pans contain sloshes and spills

Move pots and pans effortlessly across the continuous cast-iron grates

Reignites flame automatically with spark ignition system

## ACCESSORIES

2-Burner Wok Grate

36" Brushed Brass Bezels

36" Brushed Stainless Bezels

36" Chrome Bezels

36" Polished Brass Bezels

Filler Trim

High altitude conversion kits available

5" and 10" stainless steel risers, and 20" riser with shelf

Signature red, black, brushed stainless, brushed gray, or brushed brass knob kits

Accessories available through an authorized dealer.
For local dealer information, visit subzero-wolf.com/locator.

## KNOB OPTIONS

## TOP CONFIGURATION

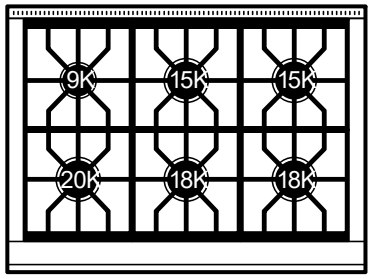


## RANGETOP SPECIFICATIONS

- Stainless-steel island trim (included)
- Stainless-steel bezels
- 1 - 9,200 Btu burner
- 2 - 15,000 Btu burners
- 2 - 18,000 Btu burners
- 1 - 20,000 Btu burner

Specifications are subject to change without notice. This information was generated on November 12, 2026. Verify specifications prior to finalizing your cabinetry/enclosures.

# 36" SEALED BURNER RANGETOP - 6 BURNERS

## PRODUCT SPECIFICATIONS

| | |
|---|---|
| Model | SRT366 |
| Dimensions | 35 7/8"W x 8 1/2"H x 28 1/2"D |
| Electrical Supply | 120 VAC, 60 Hz |
| Electrical Service | 15 amp dedicated circuit |
| Gas Supply | 3/4" ID line |
| Gas Inlet | 1/2" NPT |
| Receptacle | 3-prong grounding-type |

## ELECTRICAL




## GAS




**NOTE:** Dimensions in parenthesis are in millimeters unless otherwise specified

## DIMENSIONS

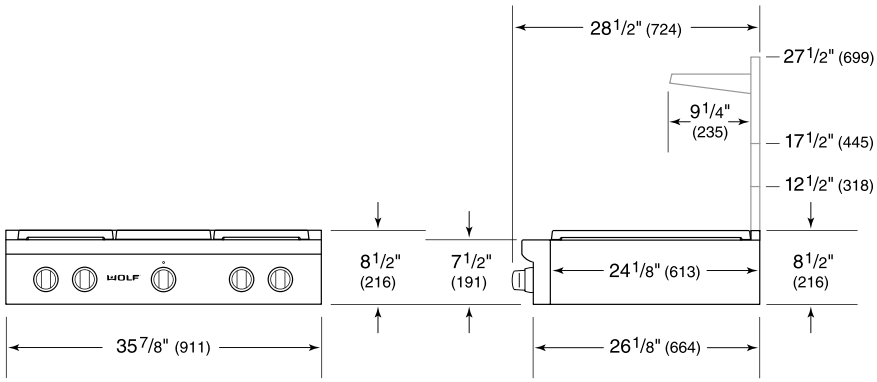


## STANDARD INSTALLATION

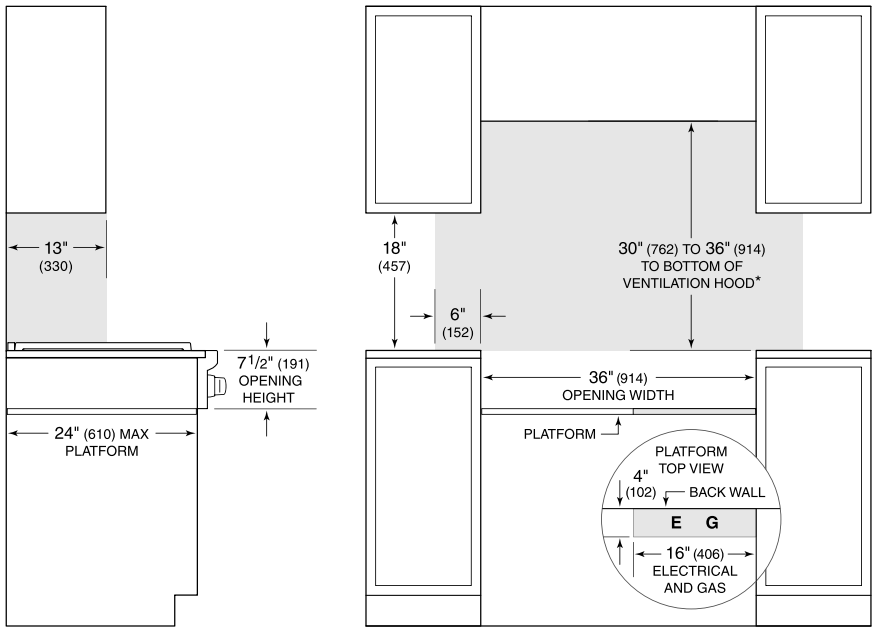


**Without ventilation hood, 36" (914) minimum clearance countertop to combustible materials, 44" (118) for charbroiler.*

*NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.*
*Electrical and gas supply located through bottom of platform.*
*For island installation, 12" (305) minimum clearance back of range to combustible rear wall above countertop.*

Specifications are subject to change without notice. This information was generated on November 12, 2026. Verify specifications prior to finalizing your cabinetry/enclosures.