30" CONTEMPORARY INDUCTION COOKTOP

CI30460C/B

FEATURES

- Consistent, precise control and nearly instantaneous temperature response
- More efficient heat transfer—energy is supplied directly to the cookware
- Intuitive, full-color LCD touchscreen controls are sleek and easy to use
- 17 power settings enhance precision with half increment adjustments
- Sensors regulate consistent low heat for simmering, melting, and warming without scorching
- Independent cooking zone timers make it easy to prepare a variety of dishes at once
- Boost Mode delivers rapid heat for 40% faster boil times, surpassing the speed of gas or electric
- Bridge two cooking zones into one larger surface for induction-capable griddles, open roasters, and fish poachers
- Sleek, subtle surface graphics make it easy to properly center cookware
- The pause feature suspends the cooktop and all timers for up to 10 minutes
- Turn off an individual cooking zone with two quick taps or power off the entire cooktop surface with one tap
- Cooktop controls automatically lock when not in use for increased safety
- Sleek black glass surface resists scratching, staining, impact, and heat
- Because spills don't stick to the surface, cleanup is quick and easy
- Frameless design installs flush against counter for a clean contemporary look

COOKTOP SPECIFICATIONS

- Unframed edge for flush installation
- Black ceramic glass surface
- Sensor based simmer, melt, and keep warm modes
- Boost Mode for rapid heat
- 1 - 6" 1,400 W Zone with 2,200 W Boost
- 2 - 8" 2,100 W Zone with 3,700 W Boost
- 1 - 10" 2,600 W Zone with 3,700 W Boost

Specifications are subject to change without notice. This information was generated on September 12, 2026. Verify specifications prior to finalizing your cabinetry/enclosures.

30" CONTEMPORARY INDUCTION COOKTOP

PRODUCT SPECIFICATIONS

Model	CI30460C/B
Dimensions	30"W x 2 1/2"H x 21"D
Weight	49 lbs
Electrical Supply	3-wire, 240/208 VAC, 60 Hz
Electrical Service	40 amp dedicated circuit
Conduit Length	4 Feet

ELECTRICAL



NOTE: Dimensions in parenthesis are in millimeters unless otherwise specified

DIMENSIONS

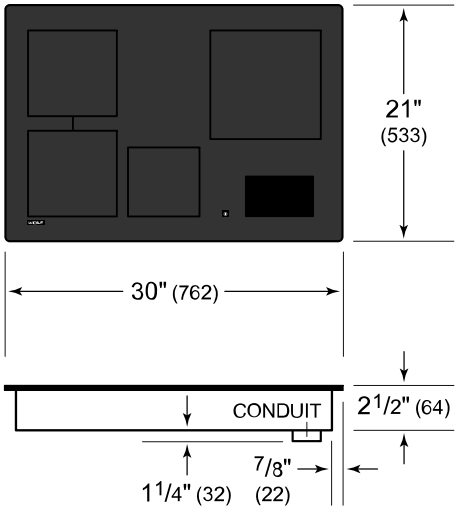

FLUSH INSTALLATION



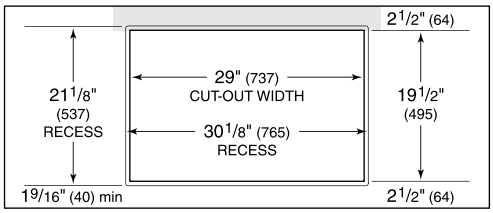

COUNTERTOP CUT-OUT

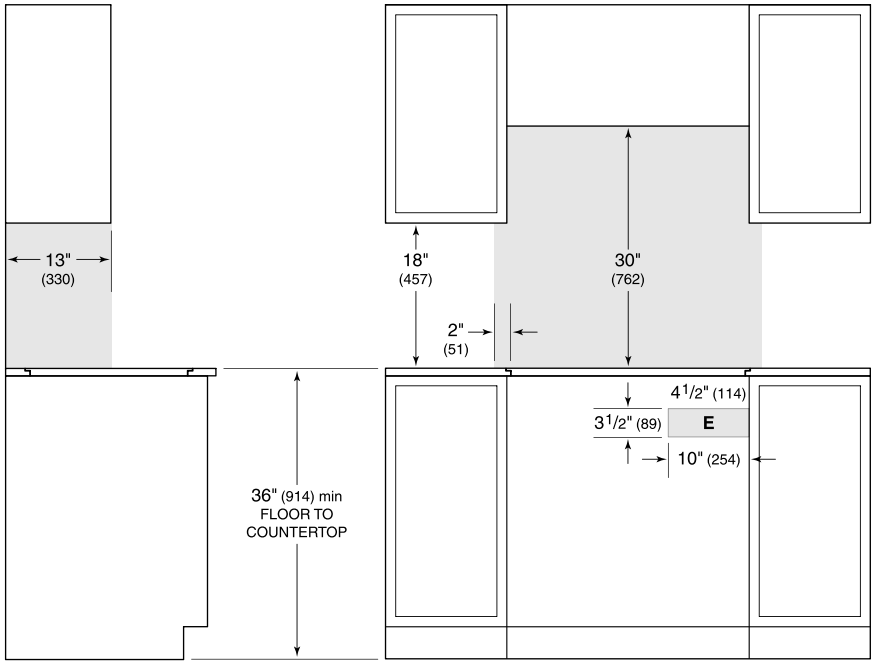

SIDE VIEW FRONT VIEW

NOTE: Shaded area above countertop indicates minimum clearance to combustible surfaces, combustible materials cannot be located within this area.
Electrical supply location only applies to installations with built-in oven.
Outside corner radius 7/16" (11).

Specifications are subject to change without notice. This information was generated on September 12, 2026. Verify specifications prior to finalizing your cabinetry/enclosures.